


**Important Note** - The backfill should be granular and free-draining with no hydrostatic pressure build-up allowed. The top block should be protected against vehicular impact. Backfill should be compacted in maximum 300mm thick layers - compacting machinery should not come into contact with wall.

**Retained Material:-**  
 Earth  
 AoR = 35 degrees  
 Maximum Density  
 18 kN/m<sup>3</sup> (1800 kgs/m<sup>3</sup>)  
 Surcharge - 30kN/m<sup>2</sup>


**It is up to the client to advise if these parameters are not correct.**

**IMPORTANT NOTE:-**  
 Ensure a minimum of 100mm well compacted material to the front of the wall.

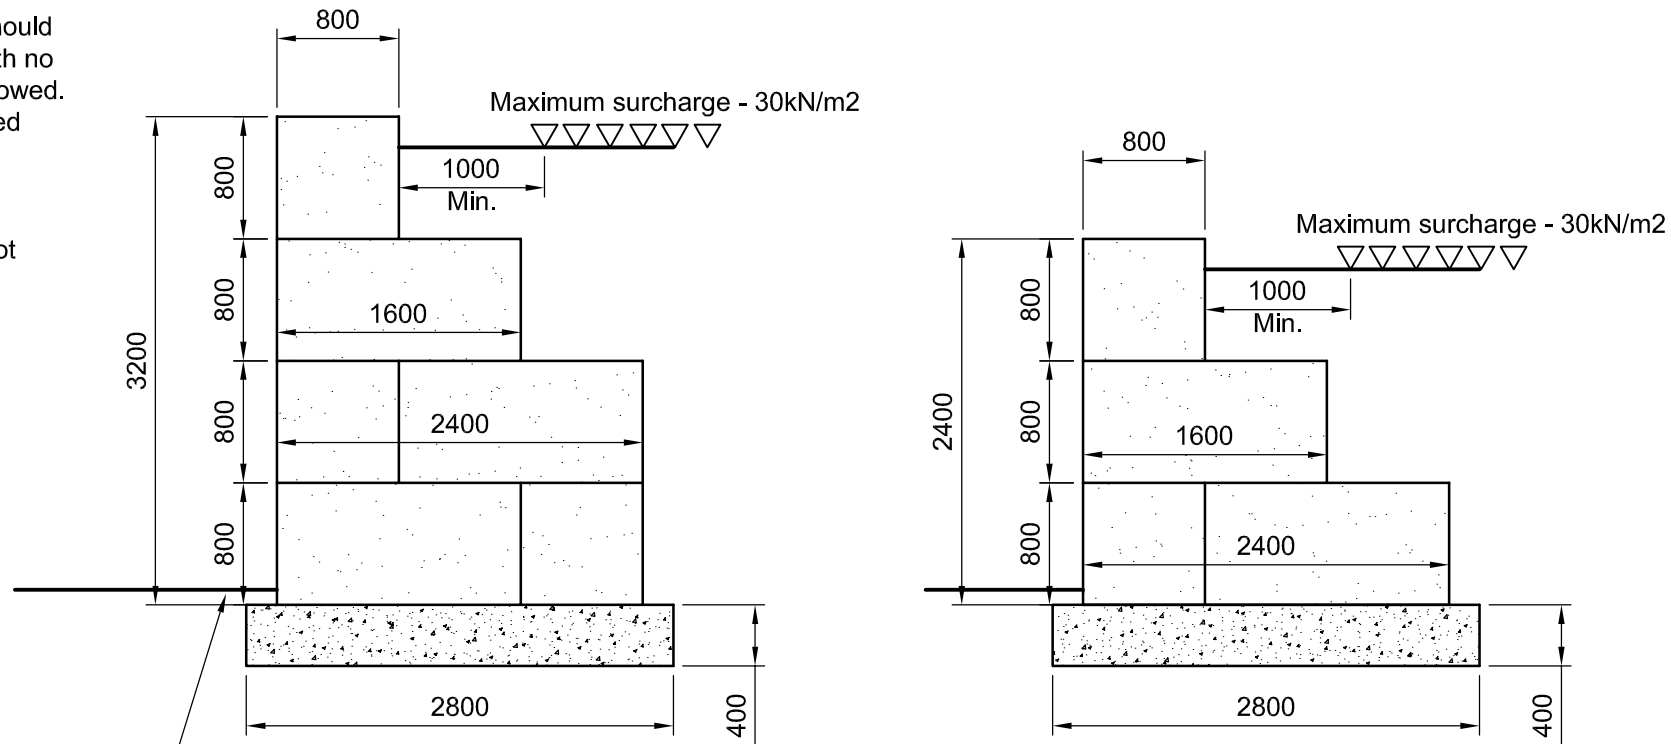


**Design Parameters** (1:50)

**NOTE:-**  
 The bearing pressure beneath the wall is shown below. An indicative foundation is shown.  
**The foundation is a Contractor Designed Element. It is up to the client to ensure the ground and foundation is adequate.**

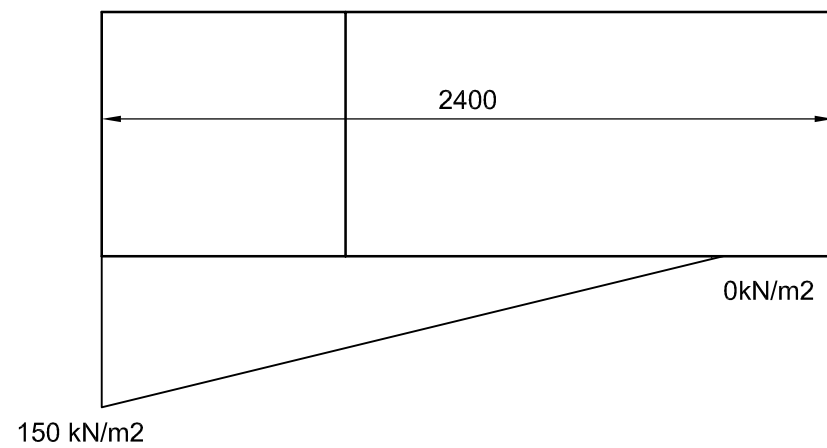

**Bearing Pressure**  
**Directly Beneath Wall**

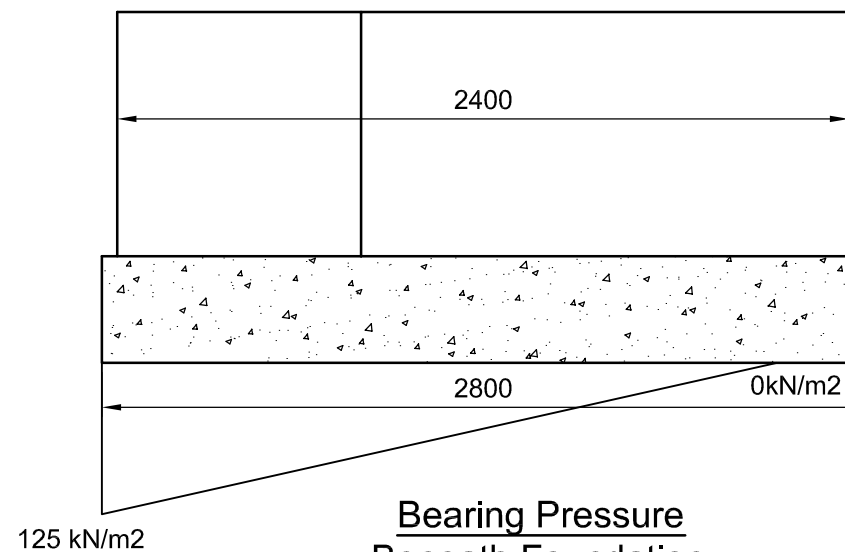

**Bearing Pressure**  
**Beneath Foundation**

**Bearing Pressures** (1:25)


**IMPORTANT NOTE:-**  
 Overall wall and foundation will need to utilise passive resistance to sliding. It is assumed that the material in front and above the foundation toe is suitable to be utilised in this manner.

- NOTES:-**
1. The contractor should take all necessary measurements on site.
  2. All dimensions shown on this drawing are approximate and for structural calculation purposes only.
  3. Dimensions on this drawing should not be used for fabrication purposes.
  4. Do not scale this drawing.
  5. This drawing should be read in conjunction with the calculations.

**IMPORTANT NOTE**  
 The existing slab and ground have not been investigated by CLP structures, the pressures exerted on the ground and slab are shown on this drawing, however **it is up to the client to satisfy himself that the existing ground and slab are adequate to support these loads.**

**IMPORTANT NOTE**  
 The wall has been designed to retain a specific material with a specific density and angle of repose. It is up to the client to ensure that the material retained on site does not exceed these designed parameters, failure to do so may result in the collapse of the wall.

Rev	Description	By	Date	Chk'd
Purpose of Issue		Rev	Date	Auth



**CLP Structures**  
 STRUCTURAL ENGINEERING CONSULTANTS  
 EMAIL: mail@CLP-Structures.co.uk  
 TEL: 0117 3706357

Client  
 Elite Precast Concrete Ltd.

Project  
 Elite Legoblock Wall

Title  
 Retaining Wall  
 Wall Design Parameters  
 and Limitations

Original Scale As noted	Drawn CEL Date Sept 17	Rev - Checked
Drawing Number		616-04