

1. Handling

- Unit Weight

Unit Ref : **1001 Channel Lid**  
 Weight : **520 kg**  
 (including rebar)

- Weight is based on 2,350 kg/m<sup>3</sup>
- Lifting system is by means of 2 no. 55mm long spherical pin anchors rated at 2.5 tonnes with a safety factor of 3.
- Lifting is achieved by use of 2 no. 2.5t rated suitable pin anchor ring clutches or combination ring clutches only and should comply with the Lifting Operation & Lifting Equipment Regulations 1998 (LOLER).

**Lifting Pin Characteristics**

Anchor Type: **T025-055**  
 Anchor Length : **55mm**  
 dia : **14mm**  
 Foot dia : **35mm**  
 Load Class : **2.5 tonnes**

**IMPORTANT NOTE :**

Prior to lifting older / pre-used lids, check the lifting pins for wear / corrosion and check the lid for cracks. If the lid is cracked or the pins are worn / damaged, it could fail when lifting.

2. Concrete

- Characteristic 28 day cube strength = 50 N/mm<sup>2</sup> min.
- Concrete is Class A1 Fire Resistant in accordance with clause 4.3.4.4 of EN 13369

3. Manufacture

- Manufactured to : **BS EN 1433 : 2002**
- Rated for : **BS EN 124 - D400 (Group 4) loading**

4. Physical & Chemical Properties




- Appearance : Grey in Colour
- Other Chemical Properties : Not Applicable

5. Design

- Design Life : **>100 years**

6. Manufacture Tolerances

- L/W/H **±5mm**

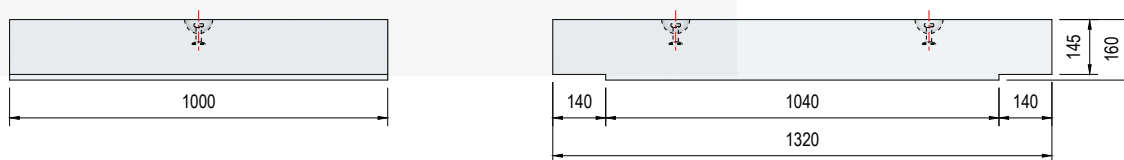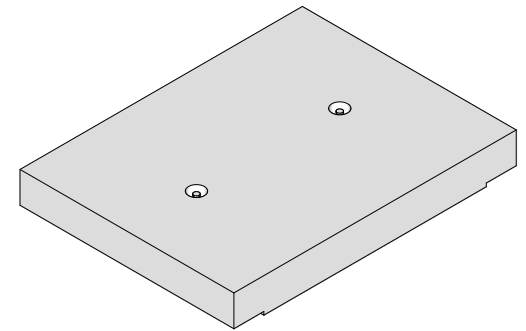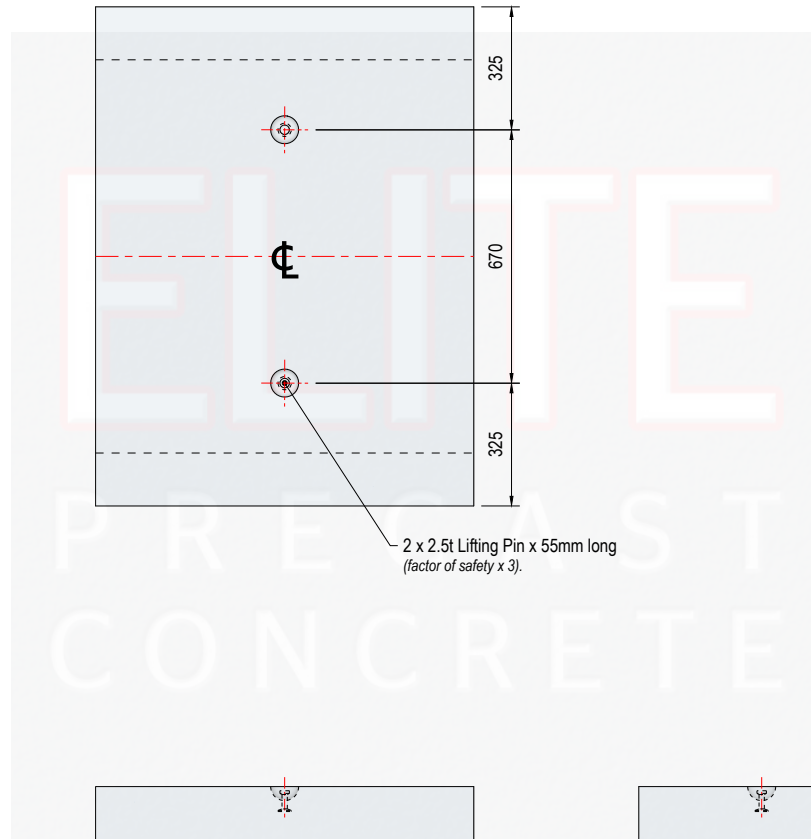

C	27.09.23	Lid lifting points changed from M20 Threaded sockets to 2.5t lifting pins.	CTC	RMD	TITLE <b>Channel Lid 1000mm x 1320mm x 160mm</b>  Elite Product Code : <b>1001</b>	ELITE PRECAST CONCRETE LTD HALESFIELD 9, TELFORD SHROPSHIRE TF7 4QW www.eiiteprecast.co.uk			
B	24.02.21	Drawing updated to BS EN124 Class D400 Rating.	CTC	RMD					
A	21.02.21	Amended to suit revised mould details.	CTC	RMD					
O	21.04.16	First Information.	CTC	RMD					
REV	DATE	REASON FOR ISSUE	DRN	APP			DRN <b>CTC</b> CHKD <b>RMD</b> DATE <b>21-04-16</b>	SIZE <b>A4</b> SCALE <b>1:20</b> DRG <b>EPC-1001</b>	REV <b>C</b>