

1. Handling

• Unit Volume / Weight

Unit Ref : LG8
 Volume : 1.105 m³
 Weight : 2400 kg

• Weight is based on 2,350 kg/m³

• Lifting system is by means of a 180mm long spherical pin anchor rated at 5.0 tonnes with a safety factor of 3.

• Lifting is achieved by use of a 5.0t rated pin anchor ring clutch or combination ring clutch only and should comply with the Lifting Operation & Lifting Equipment Regulations 1998 (LOLER).

• Lifting Pin Characteristics

Anchor Type : T-050-0180
 Anchor Length : 180mm
 dia : 20mm
 Foot dia : 50mm
 Load Class : 5.0 tonnes

IMPORTANT NOTE:

Prior to lifting older / pre-used blocks, check the lifting pin for wear / corrosion and check the block for cracks. If the block is cracked or the pin is worn, it could fail when lifting.

2. Concrete

- Characteristic 28 day cube strength = 50 N/mm² min.
- Concrete is Class A1 Fire Resistant in accordance with clause 4.3.4.4 of EN 13369

3. Manufacture

- Manufactured to : BS EN 13369 : 2013
- Tolerances to : BS EN 13670 : 2009

4. Physical & Chemical Properties



- Appearance : Grey in Colour
- Other Chemical Properties : Not Applicable

5. Design


- Design Life : >100 years

6. Manufacture Tolerances


- Length ±5mm
- Width ±5mm
- Height ±5mm

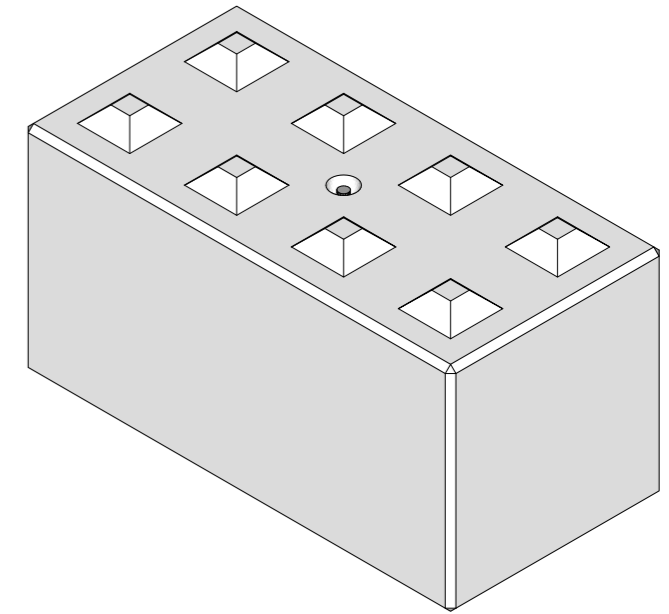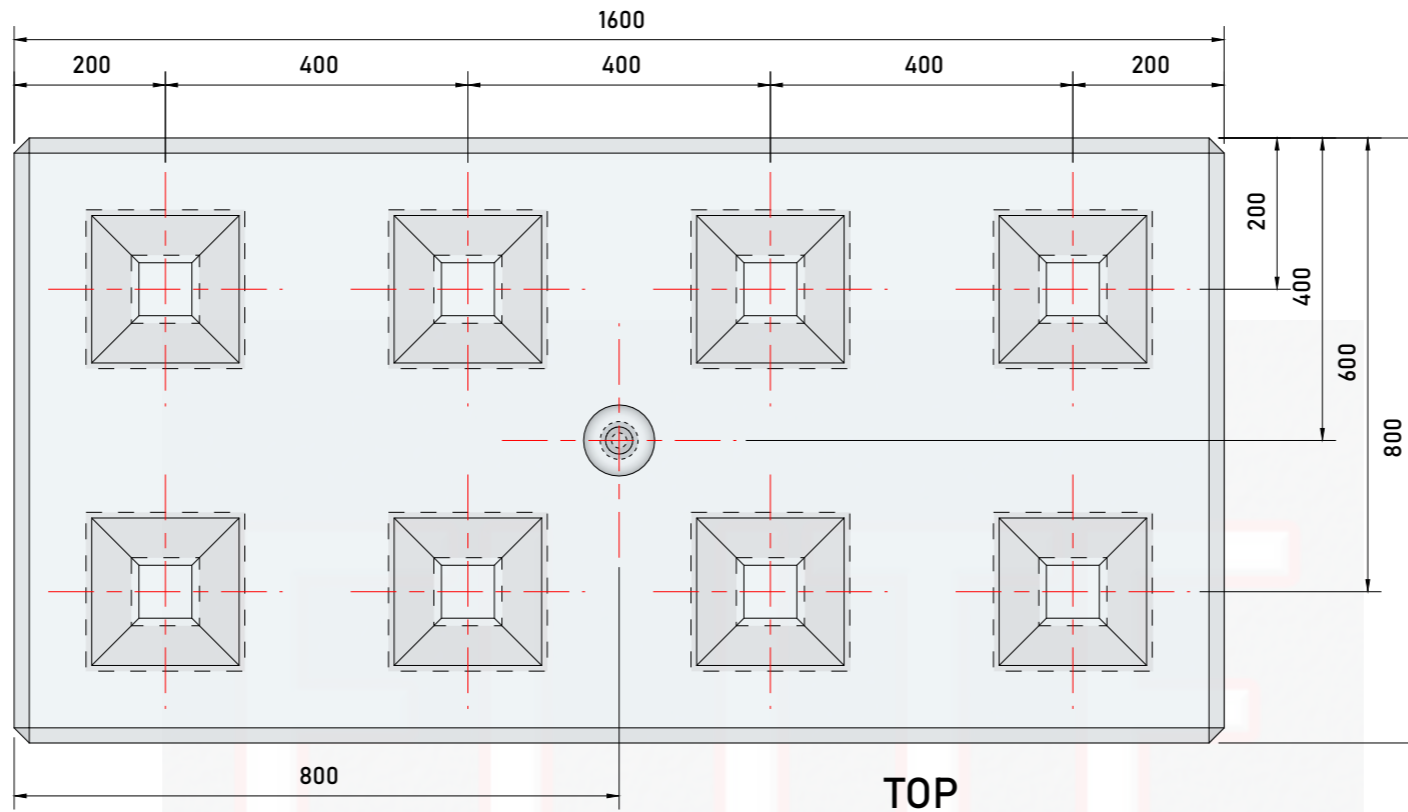

Isometric View

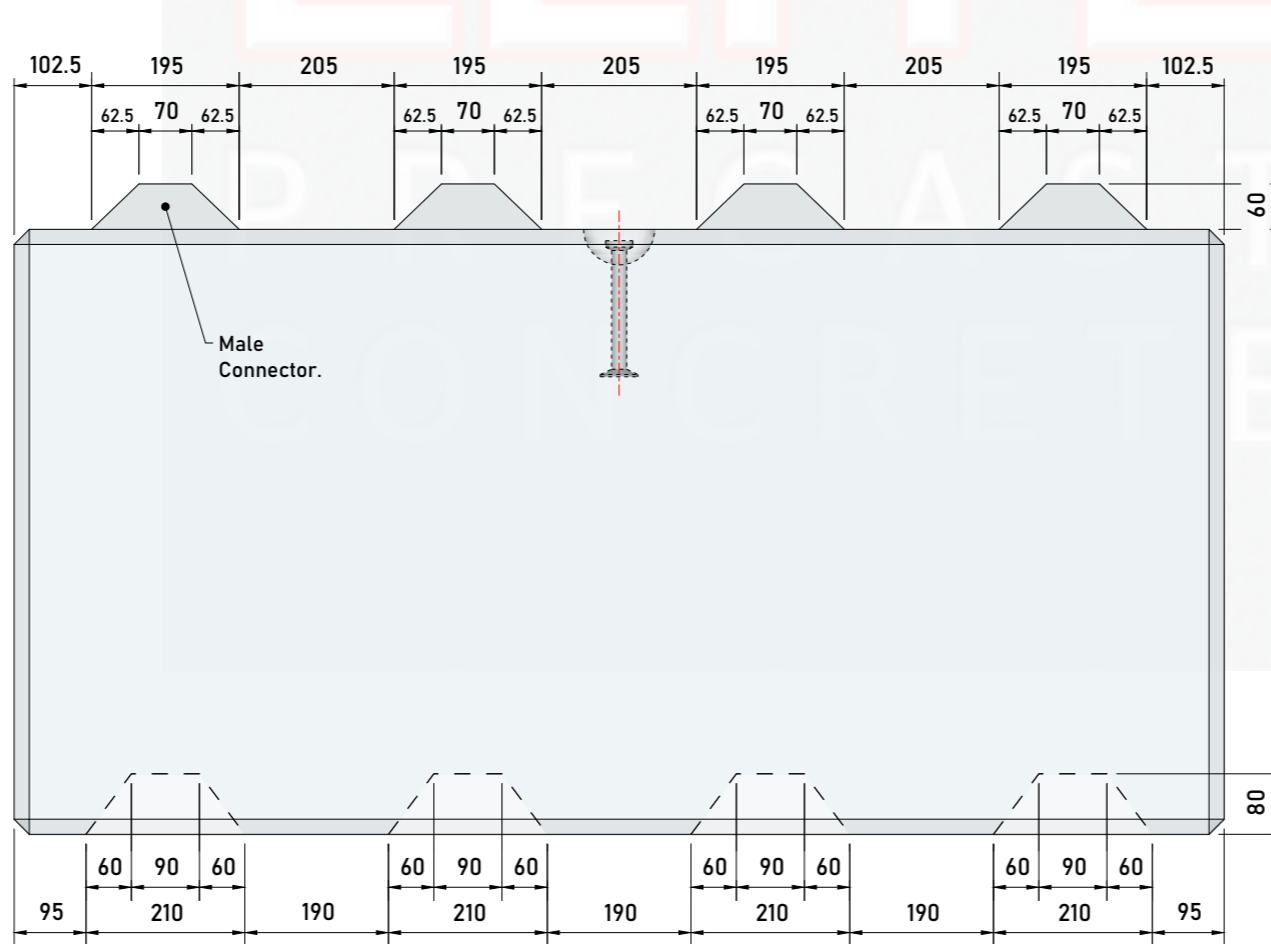

FRONT

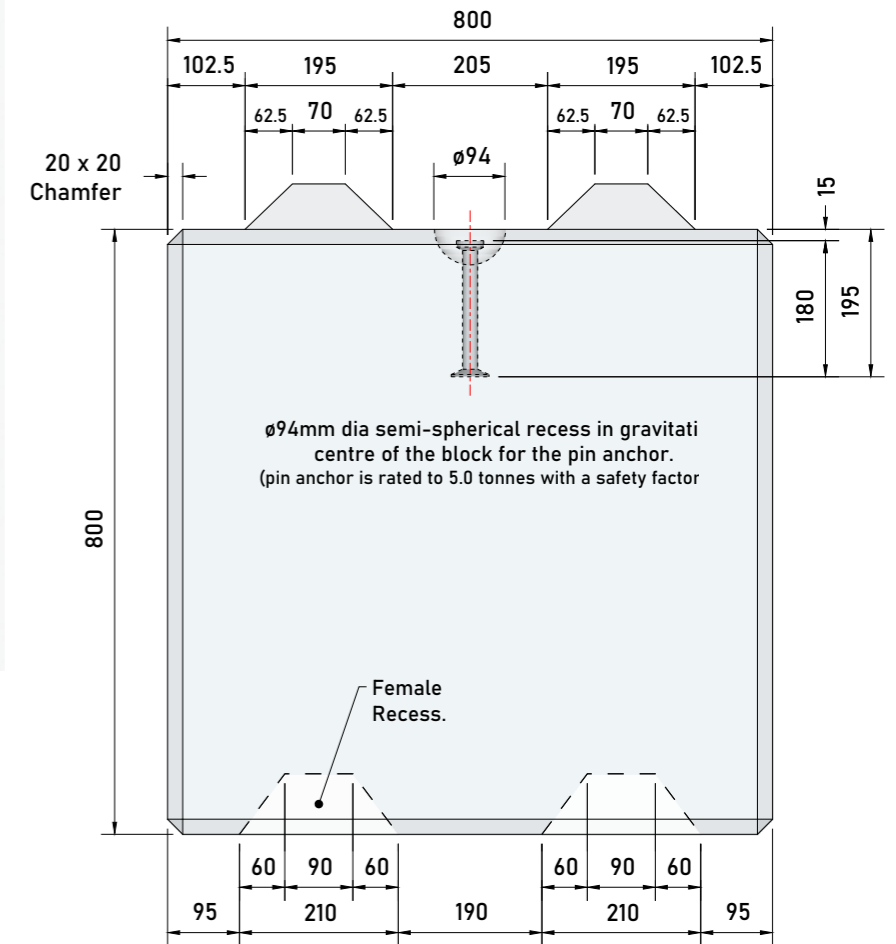

SIDE

REV	DATE	REASON FOR ISSUE	DRN	APP	REV	DATE	REASON FOR ISSUE	DRN	APP	TITLE	DRN	CTC	CHKD	RMD	DATE	SIZE	SCALE	DRG	REV	
					C	20.01.23	Title block & notes updated.	CTC	RMD	Legato® Interlocking Concrete Block 1600mm x 800mm x 800mm (Male / Female Interlocks) Elite Product Code : LG8										
					B	12.03.20	Registered Trademark ® added to the drawing.	CTC	RMD											
					A	03.01.18	Drawing revised & updated.	CTC	RMD											
					O	23.06.16	For Information.	CTC	RMD											



ELITE PRECAST CONCRETE LTD
 HALESFIELD 9, TELFORD
 SHROPSHIRE TF7 4QW
 www.eliteprecast.co.uk

SIZE A3 SCALE 1:10 DRG EPC-LEG-008 REV C